


PART NUMBERING SYSTEM

DWG.NO.


REV.	DATE	CHANGE	BY

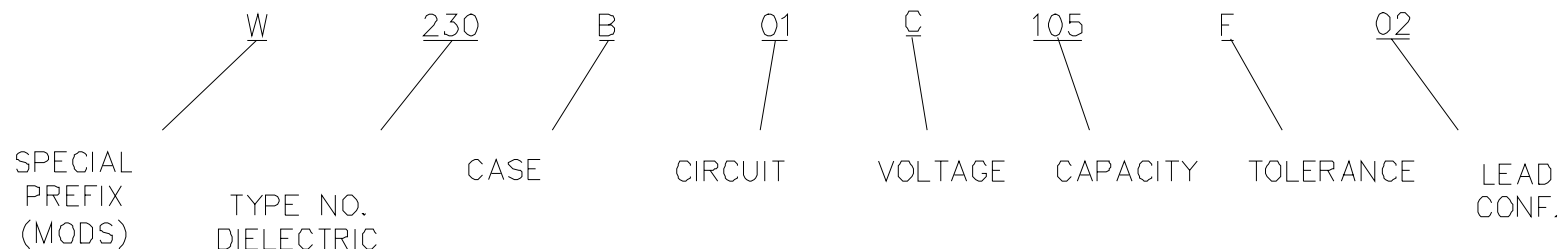

CASE STYLE

- A RECTANGULAR
- B OVAL
- C FLAT
- D TUBULAR
- E INSULATED SLEEVING
- F SIDE BRACKET
- G DOUBLE STUDS
- H SIDE SOLDER TAB—HERMETICALLY SEALED ONLY
- J AXIAL THREADED STUD
- K THREADED BUSHING
- L PARALLEL LEADS ONE SIDE
- M THREADED BUSHING
- N K STYLE WITH INSULATED SLEEVING
- P L STYLE WITH INSULATED SLEEVING
- Q M STYLE WITH INSULATED SLEEVING
- R BATHTUB, TERMINALS ON SIDE
- S BATHTUB, TERMINALS ON TOP
- T BATHTUB, TERMINALS BOTTOM

CIRCUIT

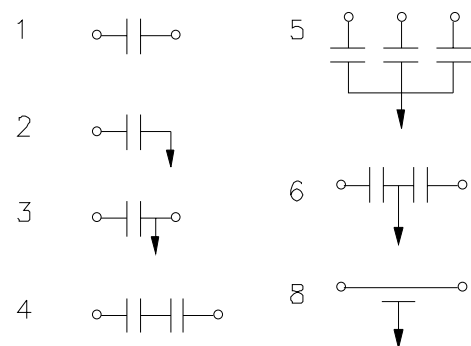

VOLTAGE


- A 50
- B 100
- V 150
- C 200
- D 300
- E 400
- F 600
- W 700
- X 800
- G 1,000
- H 1,500
- J 2,000
- K 2,500
- L 3,000
- M 4,000
- N 5,000
- P 6,000
- R 7,500
- Y 8,000
- S 10,000
- T 12,500
- U 15,000
- Q 250V

TOLERANCE


- A ± 1/2%
- F ± 1%
- G ± 2%
- H ± 3%
- R ± 4%
- J ± 5%
- K ± 10%
- L ± 15%
- M ± 20%
- W +0 -25
- X +40 -20
- Z -25
- N ±30%
- S ±7.5%
- P GMV

LEAD CONFIGURATION

- NONE AXIAL WIRE
- 01 TAB
- 02 RADIAL WIRE STRAIGHT
- 03 RADIAL FORMED WIRE
- 04 1 AXIAL, 1 RADIAL WIRE
- 05 1 TAB, 1 AXIAL WIRE
- 06 PLUG IN, 1 END PARALLEL
- 07 FLAT & PIERCED TABS

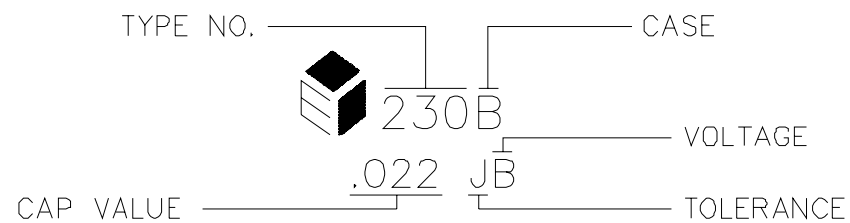

STAMP EXAMPLE FOR SMALL PARTS



DATE CODE (WHEN REQUIRE)

This Document contains proprietary information and shall not be reproduced nor shall the information contained herein be used or disclosed to others except as expressly authorized by Electrocube, Inc.

TOLERANCES UNLESS OTHERWISE SPECIFIED	XXX ± .005 XX ± .010 FRACTIONS ± .015 ANGLES ± 1/2
MATERIAL	
FINISH	



DRAWN	S.SORIANO	DATE	11-15-02	SCALE	
CHECKED		DATE	11-15-02		
APPROVED	T.COLELLA				

TITLE PART NUMBER BREAK-DOWN	
FED.ID. 14752	SHEET 1 OF 1
DWG. NO. 10.00.02	REV. IR