




Attention: Electrocube Customer Service Representativ email: esales@electrocube.com  
 Sales Rep/Distributor: \_\_\_\_\_ Date: \_\_\_\_\_  
 Rep/Dist. Contact: \_\_\_\_\_ TEL: \_\_\_\_\_ FAX: \_\_\_\_\_  
 Customer Name: \_\_\_\_\_ Contact: \_\_\_\_\_  
 Address: \_\_\_\_\_ TEL: \_\_\_\_\_  
 City: \_\_\_\_\_ State: \_\_\_\_\_ ZIP: \_\_\_\_\_ FAX: \_\_\_\_\_ email: \_\_\_\_\_


**STYLE OF CAPACITOR REQUIRED:**

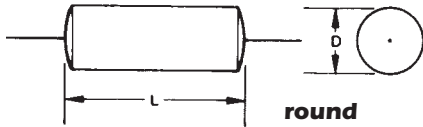

LEAD LENGTH: 2.0" ±.50"

**Axial Lead - Wrap & Fill**


Dimensions: L: \_\_\_\_\_  
D: \_\_\_\_\_



LEAD LENGTH: 2.0" ±.50"

**Axial Lead - Wrap & Fill**


Dimensions: L: \_\_\_\_\_  
W: \_\_\_\_\_ T: \_\_\_\_\_

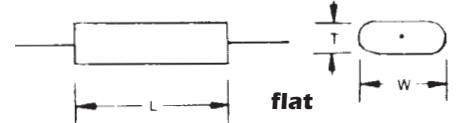

LEAD LENGTH: 2.0" ±.50"

**Axial Lead - Wrap & Fill**


Dimensions: L: \_\_\_\_\_  
W: \_\_\_\_\_ T: \_\_\_\_\_



LEAD LENGTH: 2.0" ±.50"


**Axial Lead - Epoxy Case**

Dimensions: L: \_\_\_\_\_  
T: \_\_\_\_\_ W: \_\_\_\_\_

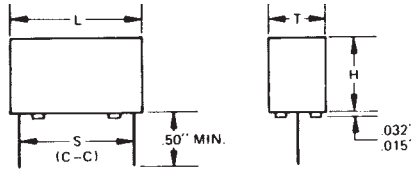

**Radial Lead - Epoxy Case**

L: \_\_\_\_\_ T: \_\_\_\_\_  
S: \_\_\_\_\_ H: \_\_\_\_\_

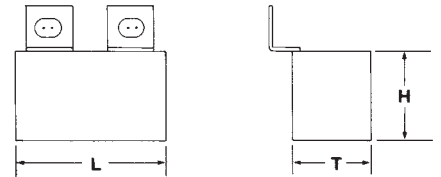

**IGBT - Epoxy Case**

Dimensions: L: \_\_\_\_\_  
H: \_\_\_\_\_ T: \_\_\_\_\_

**Metallized Dielectric:**

Polyester (mylar) 230 Series

Polycarbonate 650 Series

Polypropylene \_\_\_\_\_ 926 Series  
\_\_\_\_\_ 935 Series  
\_\_\_\_\_ 945 Series

**Film/Foil Dielectric:**

polyester/foil 250 Series

polypropylene/foil 950 Series

Other: \_\_\_\_\_

Capacitance value (MFD): \_\_\_\_\_ Tolerance: \_\_\_\_\_ % Voltage: \_\_\_\_\_ AC \_\_\_\_\_ DC

Wave Form: \_\_\_\_\_ Frequency: \_\_\_\_\_ Temperature Range: \_\_\_\_\_ Application: \_\_\_\_\_

Burn-in required:  yes  no Packaging:  Bulk  Tape and Reel  Ammo Pack

Present Supplier: \_\_\_\_\_ P/N: \_\_\_\_\_ Spec./Dwg. enc. \_\_\_\_\_

Current Quantity Requirement: \_\_\_\_\_ Annual Requirement: \_\_\_\_\_

Competitor's Purchase Price: \_\_\_\_\_ Customer Expected Price Range: \_\_\_\_\_

Special Instructions and Comments: \_\_\_\_\_