


PART NUMBERING SYSTEM

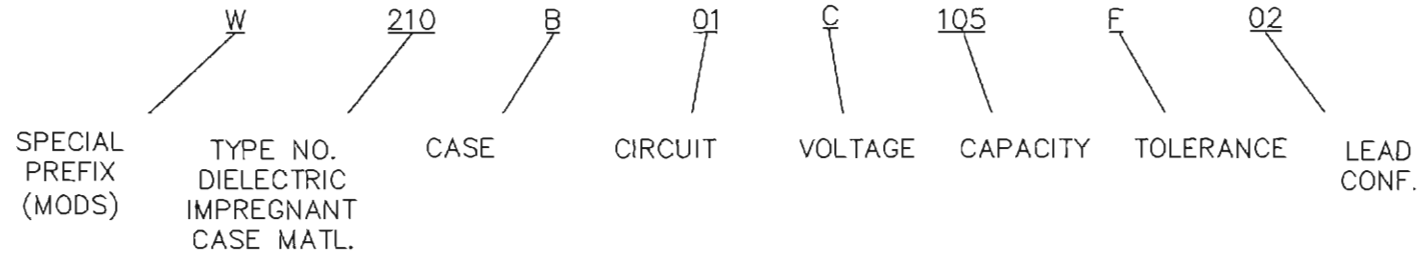

DWG.NO.

REV.	DATE	CHANGE	BY
A	6/28/00	REDRAWN FOR CLARITY	SS
B	9/12/05	CURRENT SPECIAL PREFIX "X" DETAIL IS ACTIVE.	NT
C	01/23/08	REVISE "Z" & "O" FOR VOLTAGE	NT
D	01-25-10	ADD #8 (LEAD CONFIGURATION) CORRECT "Z" VOLTAGE (ALL-OUT)	TC
E	04-13-11	REV MOD G, ADD DWGS TO LEAD CONFIG	JS

SPECIAL PREFIX (MODS)

- A MOISTURE RESISTANCE (PROCESS 10.13.02)
- B 100% I.R. (PROCESS 10.14.06)
- C SPECIAL D.F. REQUIREMENTS (SEE TRAVELER)
- D TAPE & REEL (PER EIA STANDARDS)
- E WRAP & FILL RADIAL LEADS
- F GLASS TAPE
- G TWO PART EPOXY INK STAMP
- H CUSTOMER PART NUMBER (SEE TRAVELER)
- I SPECIAL I.R. (SEE TRAVELER)
- J GLASS TAPE/FLAME TAPE/FLAME E-F
- K FLAME WRAP/FLAME END-FILL
- L NEXT LARGER SIZE
- M
- N BURN-IN & IR REQUIRED (PROCESS 10.60.01)
- O
- P TEMPERATURE CYCLE (PROCESS 10.07.00)
- Q
- R FLAME END-FILL
- S SHORTER SIZE
- T THICKER DIELECTRIC
- U TINNED COPPER LEADS
- V 100K Hz. ESR
- W CLEAR WRAP (PROCESS 10.20.03)
- X RoSH/LEAD FREE NON-COMPLIANT
- Y 10K Hz SCREEN (PROCESS 10.14.05)

CASE STYLE

- A RECTANGULAR
- B OVAL
- C FLAT
- D TUBULAR
- E INSULATED SLEEVING
- F SIDE BRACKET
- G DOUBLE STUDS
- H SIDE SOLDER TAB-HERMETICALLY SEALED ONLY
- J AXIAL THREADED STUD
- K THREADED BUSHING
- L PARALLEL LEADS ONE SIDE
- M THREADED BUSHING
- N K STYLE WITH INSULATED SLEEVING
- P L STYLE WITH INSULATED SLEEVING
- Q M STYLE WITH INSULATED SLEEVING
- R BATHTUB, TERMINALS ON SIDE
- S BATHTUB, TERMINALS ON TOP
- T BATHTUB, TERMINALS BOTTOM

VOLTAGE

- A 50
- B 100
- V 150
- C 200
- Z 35
- D 300
- E 400
- F 600
- W 700
- X 800
- G 1,000
- H 1,500
- J 2,000
- K 2,500
- L 3,000
- M 4,000
- N 5,000
- P 6,000
- R 7,500
- Y 8,000
- S 10,000
- T 12,500
- U 15,000
- Q 250
- O 30,000


TOLERANCE

- A ± 1/2%
- F ± 1%
- G ± 2%
- H ± 3%
- R ± 4%
- J ± 5%
- K ± 10%
- L ± 15%
- M ± 20%
-
-
- W +0 -25
-
- X -20 +60
-
- Z -25
-
- N ±30%
-
- S ±7.5%
-
- P GMV

LEAD CONFIGURATION

- NONE AXIAL WIRE
- 1 TAB
- 2 RADIAL WIRE STRAIGHT
-
- 3 RADIAL FORMED WIRE
-
- 4 1 AXIAL, 1 RADIAL WIRE
- 5 1 TAB, 1 AXIAL WIRE
- 6 PLUG IN, 1 END PARALLEL
- 7 FLAT & PIERCED TABS
- 8 AXIAL WIRE STANDARD, 6.0"MIN

CIRCUIT

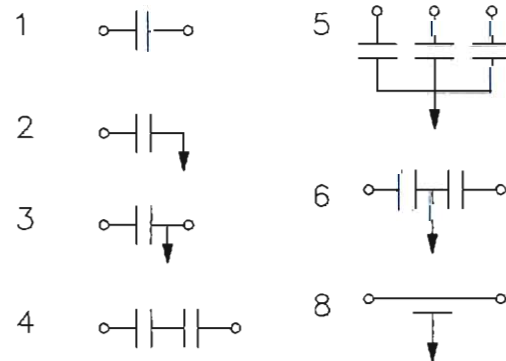

TOLERANCES
UNLESS OTHERWISE SPECIFIED

XXX ± .005
XX ± .010
FRACTIONS ± .015
ANGLES ± 1/2

MATERIAL

FINISH



DRAWN Justin Salais
CHECKED [Signature]
APPROVED [Signature]

DATE 01-25-10
DATE 7-13-11

SCALE

TITLE PART NUMBER BREAK-DOWN

FED.I.D. 14752 SHEET 1 OF 1

DWG. NO. 10.00.01 REV. E

This Document shall not be reproduced nor shall the information contained herein be used or disclosed to others except as expressly authorized by Electrocube, Inc.